


XTAR[®]

T1

Mini-sized Rechargeable EDC Light

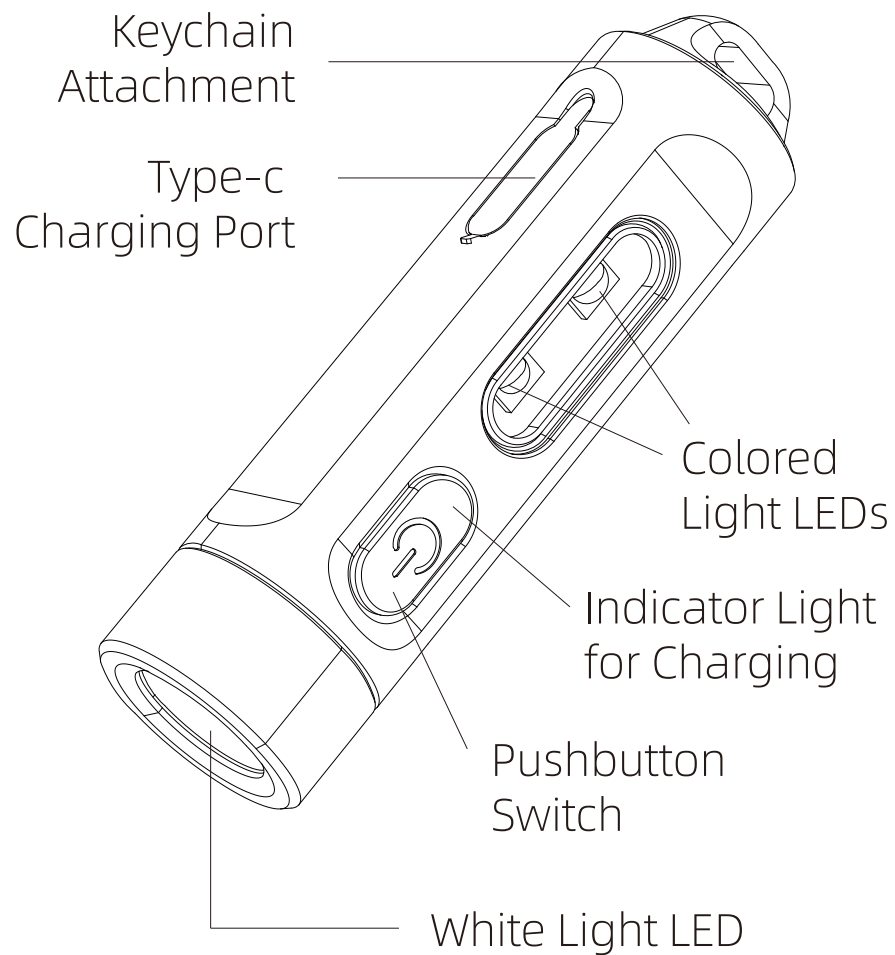

Introduction

T1 is a mini-sized rechargeable light, perfect for everyday carry. When used with keychain, it makes you feel nothing just like one key. Its operation is so simple as just by pushing a single switch to toggle brightness and modes. T1 comes with different power levels (white light only) and many colored lights, suitable for user's various needs.

Features

It's true that T1 is a lightweight flashlight, yet this one has got amazing features:

- Rechargeable built-in battery allows the light to be used for a very long time. So user don't have to throw the light away when battery is finished or look around to buy a new battery
- A single push button switch is placed, quite simple for users to play with, even young kids
- While easy to operate, that doesn't mean it is just a mini flashlight. It's more than that with many cool modes
- Memory function is also added to enhance its flexibility in uses
- It has a solid build with aluminum casing and certainly will not break when crushed under body-weight

Parameters

Model	T1				
ANSI	Illumination Levels (White Light Mode Only)				
	Moonlight	Low	Mid	High	Turbo
Brightness	2lm	50lm	150lm	300lm	500lm
Runtime	243min	109min	52min	19min	9min
ANSI	UV Light Mode	Colored Lights Mode			
	UV	Red	Green	Blue	
Brightness	3lm	6lm	7lm	5lm	
Runtime	29min	43min	52min	37min	
Drop Test	1.5m				
Built-in Battery Type	Rechargeable Li-polymer Cell				
Charging Voltage	5V				
Charging Hours	0.5hrs				
Size	Φ15.8mm*57.6mm(L)				
Weight	18.5g				

Note: the light is not waterproof, and should not be used in contact with water.

Operation

1. Charging

A solid red light at the switch turns on when charging;
And turn into a solid green at full charge;

2. ON/OFF

Single press Push button Switch to turn on and enter white light mode;

Long press Push button Switch 1.5s to turn off.

3. Push button Switch

Power on mode			Shutdown mode	
Single press	Press twice	Press three times	Single press	Long press
Regulate white light brightness or (under colored light mode) toggle colored lights	Enter colored light mode	Enter UV light mode	Power on and enter white light mode	Enter Turbo light mode Note: the Turbo light will turn off 30 seconds later, users can long press Switch again to have it back.

White light mode: Moonlight-Low-Mid-High-Strobe

Colored lights: red-green-blue-police lights-
red&green&blue sequence light-signal light

4. Memory Function

All modes have a memory function that starting the light with each mode will bring back the last lighting option used at that mode.

After-sales

Please provide warranty number to our dealer to get after-sales service.

- 15 days free replacement.
- 24 months free repair. If problem developed is beyond 24 months, we will offer free repair service but charge for parts used. The distributor will inform you material fee or related freight if any before repair.
- Lifetime technical support.

Note:

1. Damage caused by misuse or intentional abuse is not covered by the warranty.
2. You are recommended to store warranty info online: register and login www.xtar.cc - Member Center - Warranty Information.
3. Warranty number (9-13 digits) can be found on the package or product.

Global After-sales Email: service@xtar.cc

Anti-fake inquiry

1. Scratch the anti-counterfeiting label on the package to get 18-digit number.
2. Input the number into the query page on www.xtar.cc (Contact Us - Anti-fake).



**Warning: Do not direct the light
towards the eyes.
Serious injury or blindness may
occur by misuse.**



Shenzhen XTAR Electronics Co., Ltd

Address: 5th Floor, No.77 Xinhe Rd, Shangmugu,
Pinghu Area, Longgang District,
Shenzhen , Guangdong, China

Zip Code: 518111 Website: www.xtar.cc

Email: info@xtar.cc Tel: +86-755-25507076

Fax: +86-755-25507076

Made in China




V2

XTAR[®]

T1

可充电迷你随身携带手电

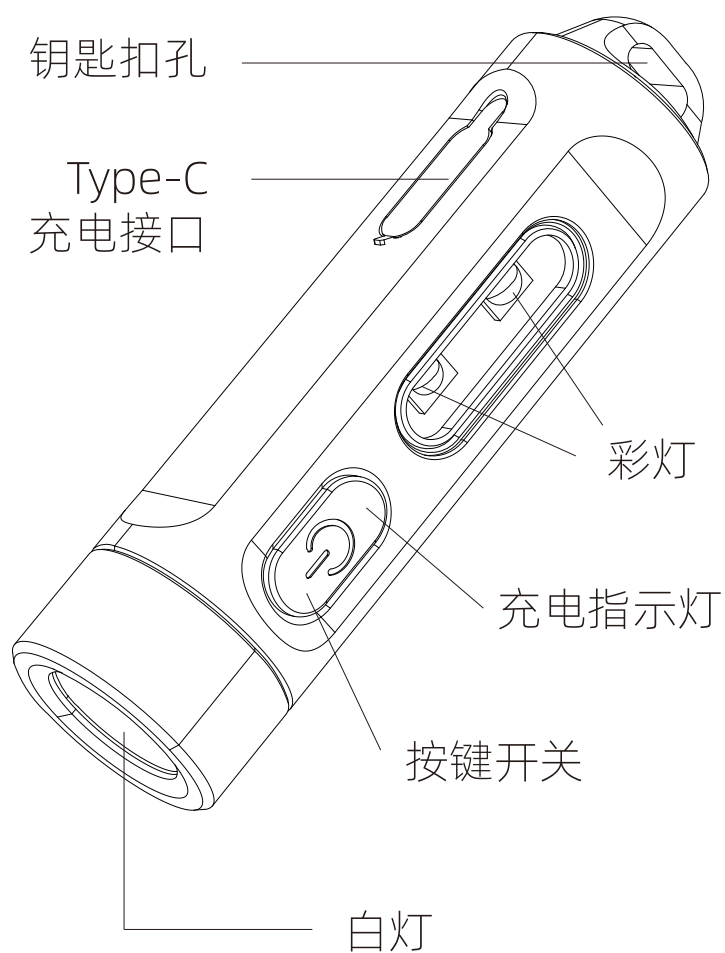

产品介绍

T1是一款可充电型迷你手电，适合随身携带。使用钥匙扣携带时，根本感觉不到重量，就像多带了一把钥匙。

T1操作方式极其简单，通过单一按键便可完成亮度和模式切换。这款小手电设有不同档位白光和彩灯模式，可满足用户的各种使用需求。

产品特点

- 虽然T1是一款重量轻的小手电，但是它不同寻常：
- 由于配有内置可充电电池，手电可以长时间使用，无需电量用尽就得丢弃或到处寻找购买新电池
- 手电仅设有单一按键，相当容易操作，即便是小孩也可以轻松使用
- 虽然使用简易，却并不代表T1只是一款小手电。它有很多炫酷的功能，不止是照明
- 加入记忆功能，使用性更高
- 手电使用铝壳，构造结实，绝不会被身体压着就因此损坏

参数

型号	T1				
ANSI	照明亮度（仅白灯模式下）				
	月光	低亮	中亮	高亮	极亮
亮度	2lm	50lm	150lm	300lm	500lm
续航时长	243min	109min	52min	19min	9min
ANSI	紫外灯模式	彩灯模式			
	UV	红光	绿光	蓝光	
亮度	3lm	6lm	7lm	5lm	
续航时长	29min	43min	52min	37min	
防跌落测试	1.5m				
内置电池类型	可充电锂聚合物电芯				
充电电压	5V				
充电时长	0.5小时				
尺寸	15.8mm(直径)*57.6mm(长)				
重量	18.5g				

注意：本产品不具防水功能，使用时请避免接触水源。

操作

1.充电

手电充电时，开关处红色指示灯长亮；充满后，绿色指示灯长亮。

2.开关机

单击开关：开机并进入白光模式；

长按开关1.5秒：关机；

3.按键操作

开机状态			关机状态	
单击开关	双击开关	三击开关	单击开关	长按开关
白光模式下切换亮度，彩灯模式下切换发光方式	进入彩灯模式	进入UV紫外灯模式	开机并进入白光模式	进入瞬时极亮档备注：长按超过30秒，将自动关机，若仍需极亮，再次长按即可；

白光模式：月光—低—中—高—白光爆闪

彩灯模式：红灯-绿灯-蓝灯-警闪-流水灯-信标

4.记忆功能

使用各模式时，都会有记忆功能，即关闭手电再次开启手电，选择使用模式，会进入该模式最后一次使用的照明方式。

售后服务

请向经销商提供保修编号以获得售后服务。

15天免费换新。

2年内免费保修。若问题发生在2年之后，我们将提供免费维修服务，但收取所用零件的费用。经销商会在维修前通知您材料费或相关运费。

终身技术支持。

注意：

- 1.因用户使用、保管不当而产生的故障不享有免费包换和保修。
2. XTAR建议您注册网络版保修卡：登入www.xtar.cn—注册—登入—会员中心—保修信息
3. 保修编号（9-13位）可在包装或产品上找到。

售后服务邮箱：service@xtar.cc

防伪查询

1. 刮开包装上的防伪标签，得到18位数字。
2. 将该号码输入www.xtar.cn上的查询页面（联系我们 - 防伪查询）。



**警告：请不要将手电直射眼睛，
否则可能因误用而造成严重伤害或失明。**

XTAR[®]

深圳市爱克斯达电子有限公司

地址：广东省深圳市龙岗区平湖街道上木古社区新河路
77号5楼 邮编：518111

官网：www.xtar.cc 邮箱：info@xtar.cc

电话：(+86) 755-25507076 传真：(+86) 755-25507076

中国制造



V2