

LITHIUM BATTERIES



CR 14505SE 3.0V 1800mAh

lithium-manganese dioxide batteries

Cell size references: AA

Electrical characteristics

(Stored for one year or less)

Nominal Capacity (0.5 mA to 2.0V, at 25°C)	1800mAh
Nominal voltage	3.0V
Max continuous discharge current	10mA
Max. Pulse current Current value is obtaining 2.0V cell voltage when pulse is applied for 15 seconds at 50% discharge depth at 25°C	100mA
Storage temperature	20°C ~ 30°C
Operating temperature	-40°C ~ 60°C
Weight(approx)	21g

WARNING:

Fire, explosion and severe burn hazard. Do not recharge, crush, disassemble, heat above 100°C, incinerate or expose contents to water.

Key features

- High and stable operating voltage
- Low self-discharge rate
Less than 1% after 1 year of storage at 20°C
- Stainless steel container
- Hermetic glass-to-metal sealing
- Non-flammable electrolyte
- Compliant with IEC 86-4 safety standard
- Non-restricted for transport

UL Component Recognition
File Number MH 45782

Main applications

- TPMS
- Alarms and security system
- Memory back-up
- Tracking system
- Automotive electronics
- Professional electronics
- Computer real-time clocks


.....

LITHIUM BATTERIES

CR 14505SE

lithium-manganese dioxide batteries

Dimensions:

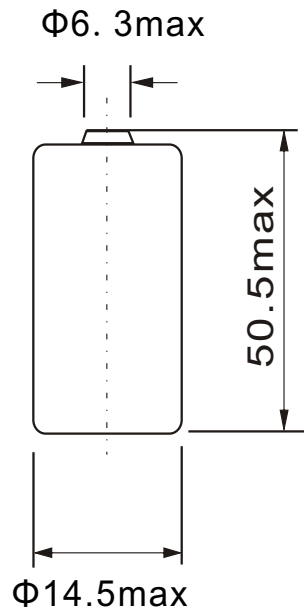

Unit: mm

Available Terminations	
-/P	Axial Pin
-/T /PT2	Radial Pin
-/PT /TP	Polarized Tab

Typical discharge at 25°C

