





图档名称: WS00U174-DL2 1600潜水手电筒 中英文说明书-V7版20250205
规格: 520mm(长)*100mm(宽) (折后65mm*100mm) / 材质: 80g铜板纸 / 工艺: 风琴折, 双面印刷 / 颜色: 黑白

备注: 出血线为3mm, 红色部分为出血线及刀模, 请勿印刷, 刀模仅供参考, 以实际开模打样确认为准。印刷成品色彩要鲜艳, 有层次感。每
特别声明: 图档版权归深圳市爱克斯达电子有限公司所有, 私自泄露、修改、使用文档所产生的一切责任后果我司将追究到底。

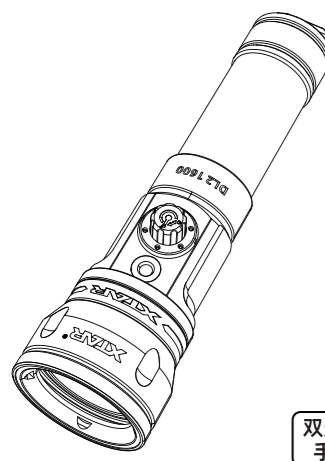

DL2 1600 UltraPointer

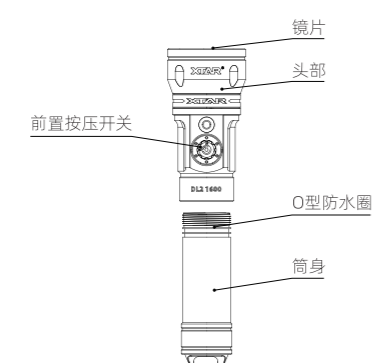

DL2 1600 手电筒结构示意图


产品介绍

DL2是一款拥有1600流明的双光源潜水手电筒, 配备白光和绿光, 能够独立或同时使用, 适应多种场景。侧按开关带有机械锁, 确保操作简便安全。100米防水深度和长续航时间, 使其非常适合潜水教练、技术潜水员、洞穴探险者和搜救任务。

产品技术参数

型号	DL2 1600		
ANSI/NEMA FL1	白光		绿光
输出	高亮档	中亮档	SOS
	1600流明	600流明	1600流明
最大射程	355m		1000m
最大发光强度	31450cd		
续航 (白光+绿光)	高亮档: 2.5hrs	中亮档: 4.9hrs	SOS: 5.5hrs
电池	1节可充21700带保护板锂电池		
发光角度	6°(聚光); 60°(泛光)		
LED灯珠	Luminus SST-40 P2		
色温	6000-6500K		
显色指数	70		
防水等级	IPX8 (水下100米)		
防跌落高度	1.5m		
开关	带机械锁磁吸按压开关		
外壳材料	军规三级硬质阳极氧化铝合金		
镜片材质	双面增透钢化玻璃		
存放温度	-20°C~40°C		
尺寸(mm)	168 (总长) x φ29 (筒身) x φ45 (头部)		
净重	213g (不含电池)		

电池安装

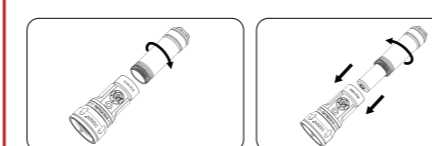

①手电筒筒身旋离头部;
②放入1节满电21700可充电锂电池, 电池正极(+)朝向手电筒筒身, 并顺时针拧紧筒身直至拧紧。

电量指示灯

绿灯	红灯	红灯闪烁
电量充足	可用时长约30分钟	可用时长约10分钟


售后服务

请提供带保修号的产品及发票(或收据)以获得售后服务。

- 15天免费包换。
- 24个月免费保修。超出保修期的维修需要您支付材料和运输费用。
- 终身技术支持。

• 请注意:

- 1、因用户未按照本手册使用或保管不当而产生的故障不享有包换和保修服务。
- 2、如有售后问题, 请联系官方售后邮箱: service@xtar.cc。




微信公众号


深圳市爱克斯达电子有限公司
地址: 广东省深圳市龙岗区平湖街道上木古社区新河路77号5楼

官网: www.xtar.cn 邮箱: info@xtar.cc
电话/传真: (+86) 755-25507076 邮编: 518111

中国制造 V7

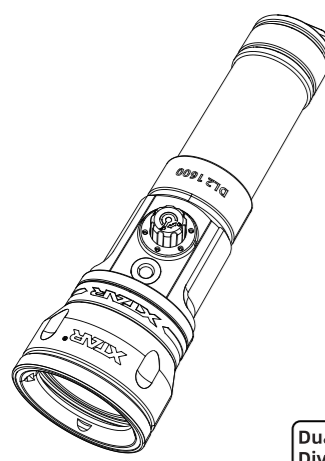

DL2 1600 UltraPointer

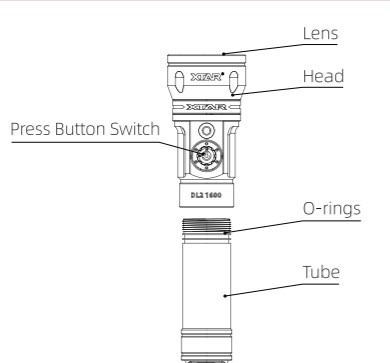

DL2 1600 手电筒结构示意图

Introduction


The DL2 is a 1600-lumen dual-light dive torch with white and green light, which can be used independently or together to suit various scenarios. The side switch with a mechanical lock ensures easy and secure operation. With 100-meter waterproofing and long runtime, it is perfect for dive instructors, technical divers, cave explorers, and rescue missions.

Technical Specifications

Model	DL2 1600		
ANSI/NEMA FL1	White		Green
Output	High	Mid	SOS
	1600 lumens	600 lumens	1600 lumens
Max Beam Range	355m		1000m
Max Intensity	31450cd		
Runtime (White+Green)	High: 2.5hrs	Mid: 4.9hrs	SOS: 5.5hrs
Battery	1*rechargeable 21700 protected Li-ion battery		
Beam Angle	6°(Spot); 60°(Flood)		
LED	Luminus SST-40 P2		
Color Temperature	6000-6500K		
Color Index Rendering	70		
Waterproof	IPX8 (100m underwater)		
Impact Resistance	1.5m		
Switch	Magnetic Press button with Mechanical Lock		
Housing Material	Type III hard anodized aluminum alloy		
Lens Materials	Tempered glass with anti-reflective coating		
Storage Temp.	-20°C~40°C		
Dimensions(mm)	168 (Length) x φ29 (Tube) x φ45 (Head)		
Net Weight	213g (without battery)		


*Notice: Stated data has been measured according to the international

电池安装

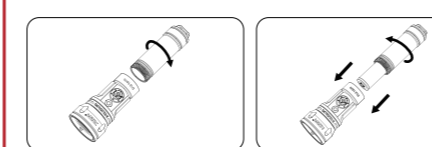

①Unscrew the tube from the head;
②Insert a full rechargeable 21700 Li-ion battery in with the positive polarity(+) towards the head and tighten the body by turning it clockwise until secure.

Brightness Settings and Operation

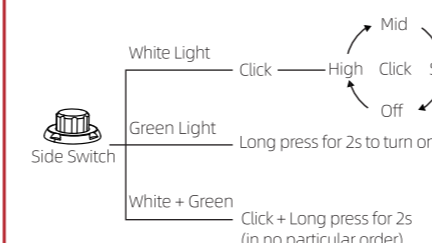

Side Switch: White Light (Click), High (Click), Mid (Click), SOS (Click), Off (Click), Green Light (Long press for 2s to turn on/off), White + Green (Click + Long press for 2s in no particular order)

Battery Indicator

Green	Red	Flashing Red
Sufficient power	Available for about 30min	Available for about 10min


After-Sales Service

To receive after-sales service for the product, please provide the Warranty Number and an invoice(or receipt).

- 15-day free exchange.
- 24-month free repair. This product includes a 24-month free repair service, starting from the day of purchase. For repairs outside of the warranty period, you will need to pay the costs of materials and shipping.
- Lifetime technical support.

Note:

- Malfunctions due to improper use or storage, or failure to observe these operating instructions, will not be covered by XTAR.
- If you have any after-sales questions, please contact XTAR official Customer Support at service@xtar.cc.



Facebook

Shenzhen XTAR Electronics Co., Ltd
Address: 5th Floor, No.77 Xinh Rd, Shangmugu, Pinghu Area, Longgang District, Shenzhen, Guangdong, China Zip Code: 518111

Website: www.xtar.cc Email: info@xtar.cc
Tel / Fax: +86-755-25507076
Made in China

V7