



## 1. Product Model : LCB60-F

P/N	Part Description	Sketch
97002-F.R	LCB60-F Plastic Housing Assembly, Red, Rear Cover , Orange	
97002-F.B	LCB60-F Plastic Housing Assembly, Black Rear Cover , Orange	
97002-F.O	LCB60-F Plastic Housing Assembly , Orange, Rear Cover , Orange	
91021-F.S	LC60-F Copper Terminal Assembly	

## 2. Product Application Description

As a model of wire-harness to 90° soldered PCB joint connector in LC60 connector series, LCB60 apply in the field which require quite smaller space for connection between Li-battery、controller and motor mainly.

## 3. Product stacking diagram

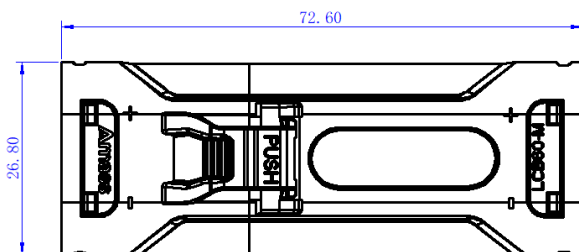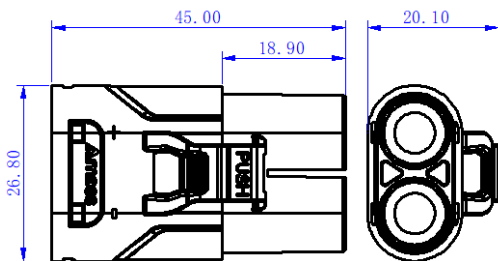

## 4. Technical Parameters

Electric Characteristic	
Current Rating	65A MAX(6AWG 0.08mm/16.0mm <sup>2</sup> 0.31mm <sup>Δ</sup> ≤30K)
	55A MAX(8AWG 0.08mm/10.0mm <sup>2</sup> 0.41mm <sup>Δ</sup> ≤30K)
	80A MAX(6AWG 0.08mm/16.0mm <sup>2</sup> 0.31mm <sup>Δ</sup> ≤40K)
	65A MAX(8AWG 0.08mm/10.0mm <sup>2</sup> 0.41mm <sup>Δ</sup> ≤40K)
	90A MAX(6AWG 0.08mm/16.0mm <sup>2</sup> 0.31mm <sup>Δ</sup> ≤55K)
	70A MAX(8AWG 0.08mm/10.0mm <sup>2</sup> 0.41mm <sup>Δ</sup> ≤55K)
Voltage	1000V DC
	≥2000MΩ
Insulation Resistance	≥2000MΩ
Contact Resistance	≤0.6mΩ
Mechanical Characteristic	
Plug Life	100 次
FG Insertion Force	≤9.0kgf
FG Extraction Force	≥14kgf
Terminal Pushing Out Froce	≥16kgf
Salt Spray	Main brass parts 48h , Jaws 24h
Environment Characteristic	
Work Temperature	-40°C to 120°C
Materials Flame Level	UL94 V-0 ( Minimum Thickness 0.8mm )
Hot Wire Level	GWFI 850°C ( Minimum Thickness 0.8mm )
Environmental	RoHS2.0
Material	
Outside Housing	PBT GF30, Color: Red\Black\Orange
Main Terminal	Copper--T2, Plating: Sliver
Usage	
Joint Method	Rivet Joint
Joint Reference	Refer to <Six Side Riveting Process for LC series>

## 5. Transport and storage

- Product should be store in the clean and dry enviroment, far away from acid、alkali and the other corrosive gases.
- Storage enviroment: Temperature -10°C~40°C , Relative Humidity : ≤80%
- Product have to far away from light source (silver plating part), sealed packaging to store. Mustn't exposure to air for a long time or touch with sulfides, No bare hands touching.
- Apply to normal transport, should be avoiding collision、violent vibration、raining and snowing onto product、flooding ect.



During connector using, do not exceed the rated current and voltage



Please confirm the environment



Use carefully



Do not use when external force is applied to the connector

Prepared By :

Auditor :

Quality Checker :

Approver :