## DURACELL®

## **Alkaline-Manganese Dioxide**

Dimensions shown are IEC/ANSI standards

\*

1.7


and discharge data shown for examples of the energy / service life that the battery will provide.

Nominal Voltage: Average Weight: Volume: Terminals: Operating Temperatur Range: ANSI: IEC:


Nominal Voltage:	1.5 V
Average Weight:	1.7 gm (0.06 oz.)
Volume:	0.57cm <sup>3</sup> (0.035 in. <sup>3</sup> )
Terminals:	Flat
Operating Temperature Range:	-20°C to 54°C (-4°F to 130°F)
ANSI: IEC:	1166A LR 44

Size:



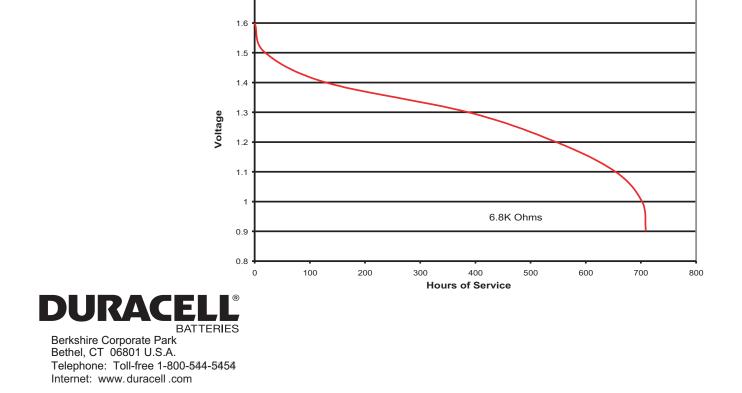

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the chart



76A

LR 44