

**Description** : Alkaline High Voltage Battery

**Nominal Voltage** : 12Volts

**Nominal Dimensions** : Ø8.0mm×28.2mm

**Terminal** : Nickel plated flat contacts - protruded  
red(+); recessed black (-)

**Jacket** : Metal jacket

**Internal Connection** : Pressure

**Applications** : Remote controller

**Average Weight** : 4.4g

**Date Code** : Unless otherwise specified, each batteries will carry a numeric year code and analogue month code

**Shelf Life** : Not less than 90% of the service capacity within first year. , not less than 85% of the service capacity with third year storage at 22 ± 3 °C  
40-80 %RH

**Insulation** : 5MΩ min.

**Resistance**


**Close Circuit Voltage** : 10.5Volts (min.)(load resistor 1.6kΩ  
at 22 ± 3 °C for 0.1 to 2 seconds)

**Current Drain** : Under 15mA pulse, 0.5mA  
continuous

**Nominal Service Life** : 38hrs (at 20kΩ load)  
(to 6.0V at 22 ± 3 °C)

**Average Service** : 20mAh(at 20kΩ load)

**Capacity**  
(to 6.0V at 22 ± 3 °C)

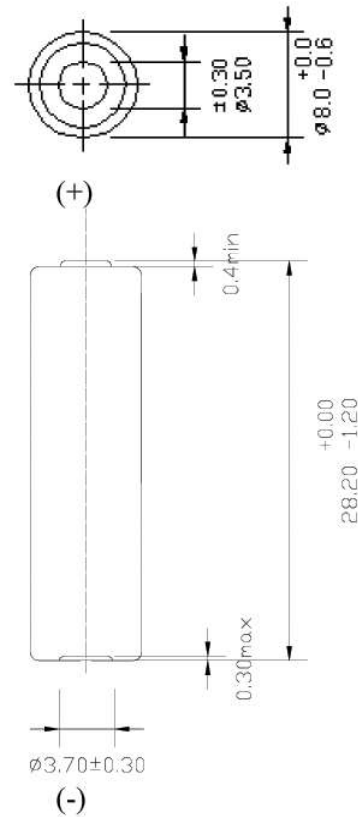

Unit : mm

**Typical Discharge characteristics at 22 ± 3 °C**

