


SANYO

Cadnica

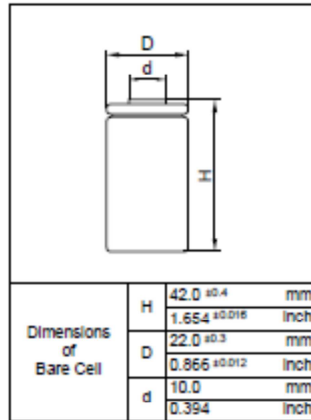


Cell Type N-1900SCR Specifications


Nominal Capacity		1900mAh	
Nominal Voltage		1.2V	
Charging Current	Standard	190mA	
	Fast	2900mA	
Charging Time	Standard	14 to 16Hrs.	
	Fast	about 1Hr.	
Ambient Temperature	Charge	Standard	0°C to +45°C [+32°F to 113°F]
		Fast	5°C to +40°C [+41°F to 104°F]
	Discharge	-20°C to +60°C [-4°F to 140°F]	
	Storage	-30°C to +50°C [-22°F to 122°F]	
Internal Impedance (Av.) (at 50% discharge)		4.0mΩ (at 1000Hz)	
Weight		58g/2.05oz	
Dimensions(D)×(H) (with tube)		22.9 ⁰ _{-0.1} × 42.9 ⁰ _{-0.2} mm 0.90 ⁰ _{-0.04} × 1.69 ⁰ _{-0.05} inch	

Typical Characteristics


Charge Characteristics (5 cells pack)

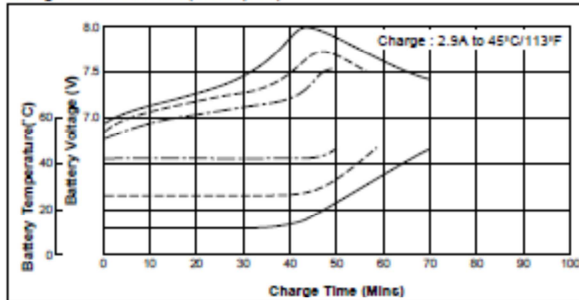


Discharge (at high rate)

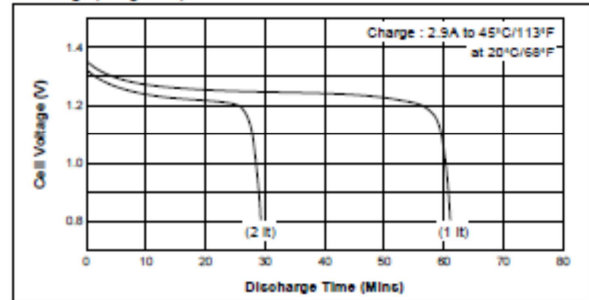


Cell Capacity (at various discharge rate)

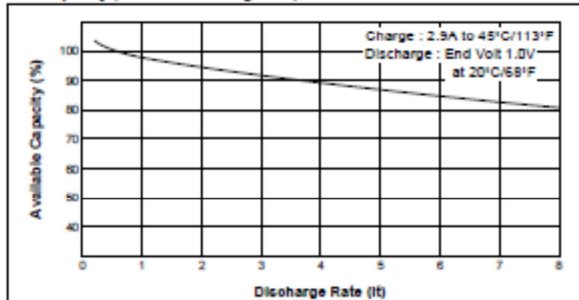


Discharge (at high rate)

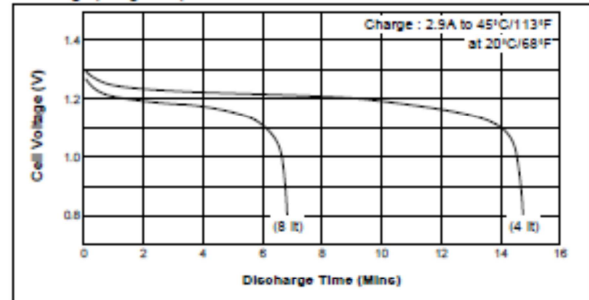

Discharge (at low rate)

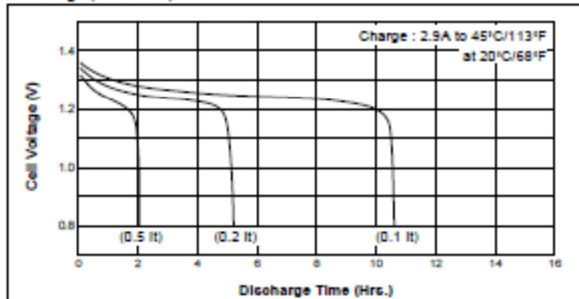

Temperature (Charge & Discharge)

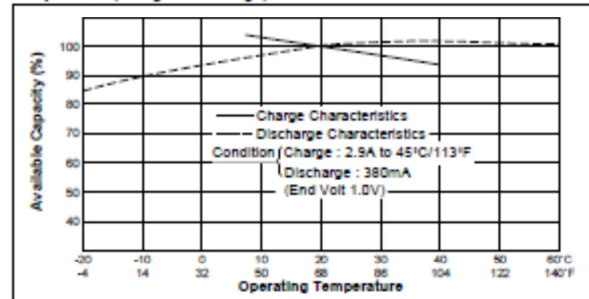

CO030825

For further information please contact us +48 42 672 42 02 | office@bto.pl | www.bto.pl | www.bto.net.pl
 O szczegóły prosimy pytać nasz dział techniczny +48 42 672 42 02 | office@bto.pl | www.bto.pl | www.bto.net.pl
 Producent zastrzega sobie prawo do dokonywania zmian w specyfikacji niniejszego produktu