



XTAR 14500 1200mAh Li-ion Rechargeable Battery



Standard Dimensions




Specifications

Nominal Capacity:	1200mAh
Mini Capacity:	1150mAh
Nominal Voltage:	3.6V
Discharge Cutoff Voltage:	2.5V
Max Discharge Current:	2.8A
Continuous Discharge Current:	2.5A
Internal Resistance:	≤130mΩ
Cycle Life:	500+
Standard Charging Voltage:	4.2±0.03V
Standard Charging Current:	240mA
Max Charging Current:	840mA
Discharge Overcurrent Protection:	3.0-4.8A
Transport Voltage:	3.7~3.9V
Protected:	Yes
Positive Pole:	Button Top
Operating Temperature:	-20 to 60°C
Storage Temperature:	-20 to 50°C (best at 25±5°C)
Net Weight:	≤20g

Name	XTAR 3.6V 14500 1200mAh Li-ion Rechargeable Battery				
Test Condition	Tests are carried out under the temperature of 20±5°C				
Test Current(A)	0.2	0.6	1.2	2.4	2.8
Measured Capacity (mAh)	1200	1180	1152	1092	1053
Measured Energy (Wh)	4.2	4.1	3.9	3.5	3.3


Milliamp-Hours Capacity

Constant Current Discharge to 2.5 Volts

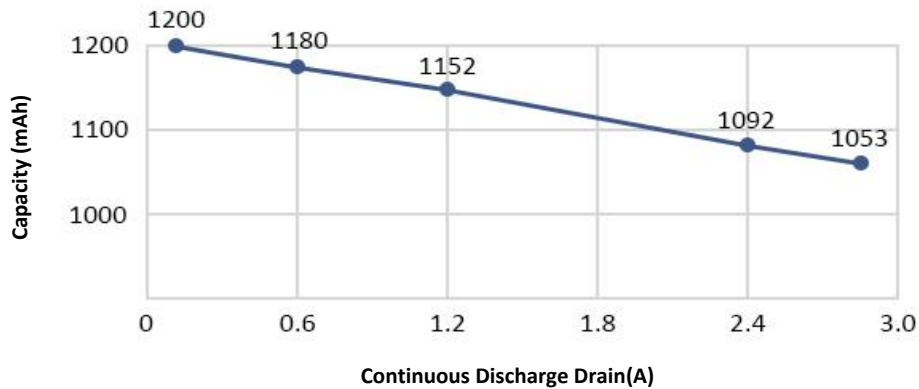


Discharge Profile

Constant Current Discharge

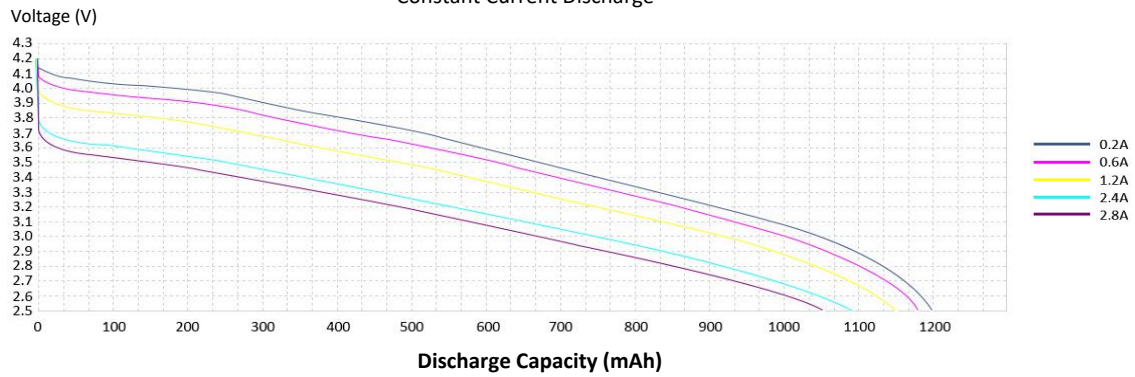


Constant Output Performance

Typical Discharge Characteristics (20 ± 5°C)

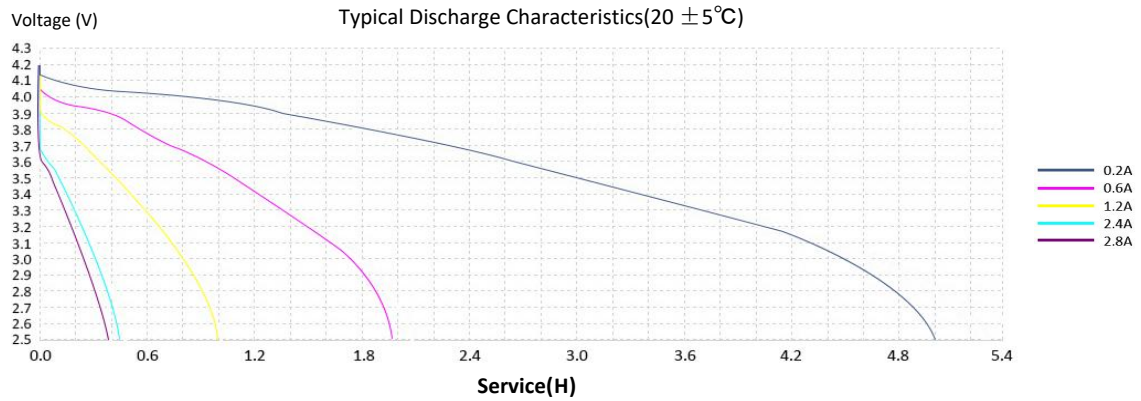

Charging Current Diagram

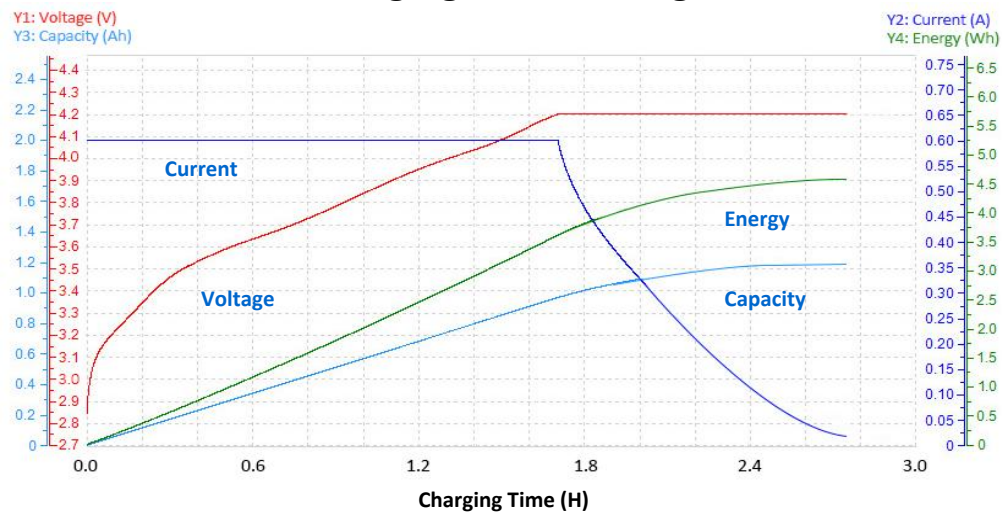

Important Notice

This data sheet contains typical information specific to batteries manufactured at the time of its publication.

Contents herein do not constitute a warranty.

©XTAR - All Rights Reserved