

AAA size

eneloop
Ready to use Rechargeable Battery TM



Specifications

Model	BK-4MCDE		
Type	AAA size consumer type		
Country origin	Japan		
Capacity (minimum) ¹⁾	800 mAh		
Nominal Voltage	1.2V		
Charging Current	Fast Charge ²⁾	Max. 800 mA	
Ambient Temp.	Charge	0°C - 40°C	
	Discharge	-20°C - 50°C	
	Storage	Less than 90 days	-20°C - 40°C
		Less than 1 year	-20°C - 30°C
Internal impedance (after discharge to E.V.=1.0V) ³⁾		Approx. 40mΩ (at 1000Hz)	

1) Single cell capacity under the following condition.


Charge : 80mA×16h, Discharge : 160mA(E.V.=1.0V) at 25°C

2) Use recommended charging system. 3) After a few charge and discharge cycles under the above 1) condition.

Cell size, weight with tube

Dimensions	D	10.5mm
	H	44.5mm
Weight	Approx. 13g	


10.5mm

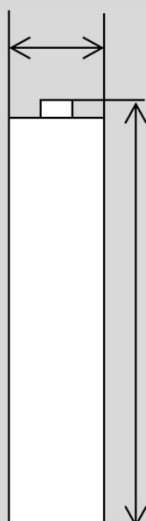

44.5mm

Typical Characteristics

Charge

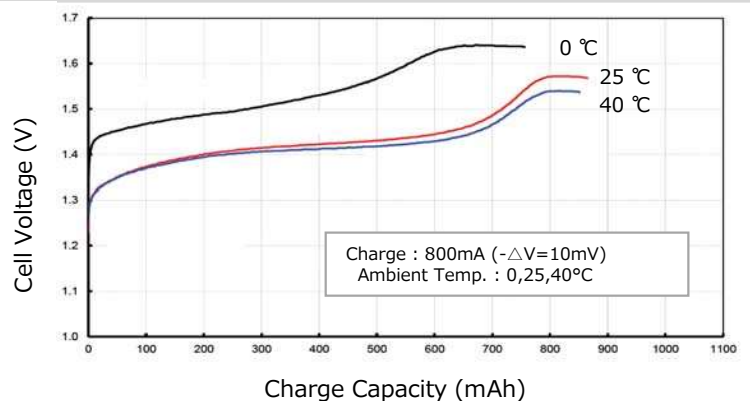

Discharge

